
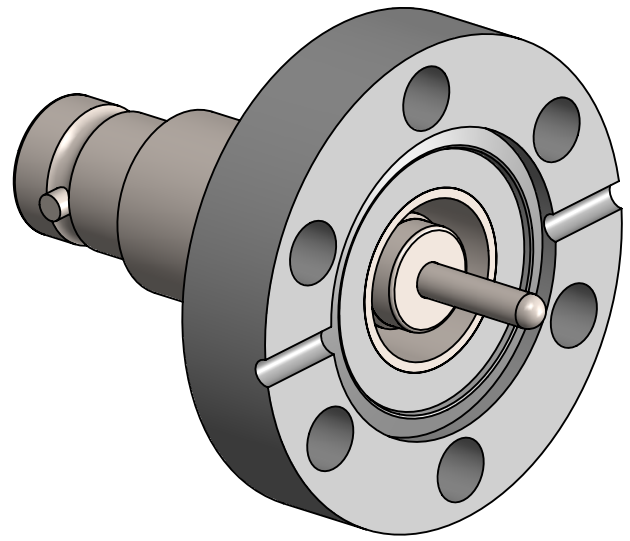
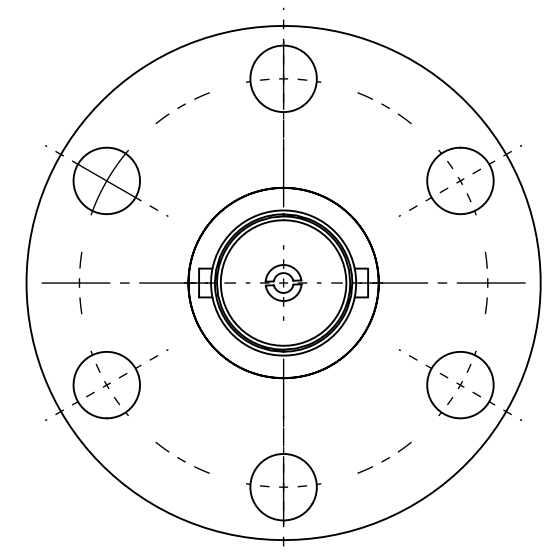
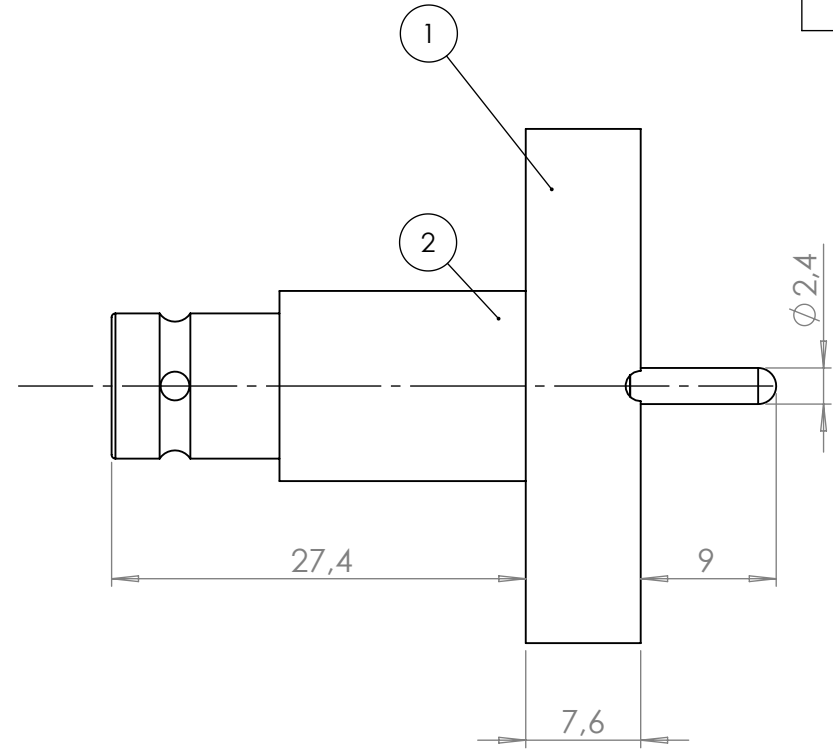


POS.	DESCRIPTION	MATERIAL	QTY
1	modified flange DN16 CF	1.4404 (316L)	1
2	coaxial f/t type BNC, 500V, 3A, grounded shield, weldable	Stainless Steel	1

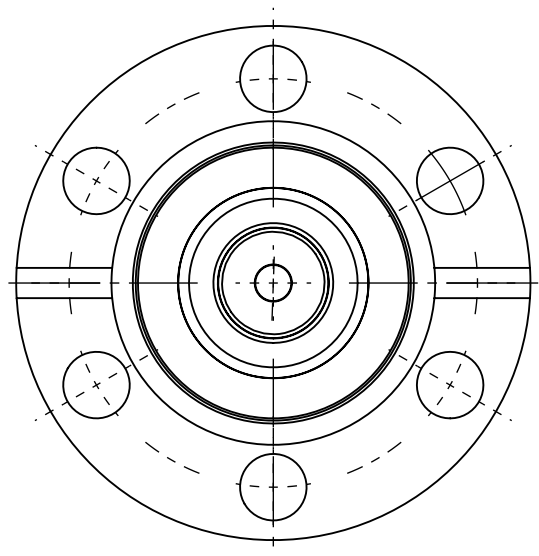

air side connector included

All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allectra GmbH.		Verwendetes Material (USED MATERIAL)		Bemerkung (REMARKS)		Kanten (EDGES)		PROJECTION	
Oberfläche (SURFACE) Cleaned UHV- Compatible		Rauheit (ROUGHNESS) √		Maßstab (SCALE): 2:1		Gewicht (WIGHT):		57.15g	
origin name: Allectra standard		DATE: 01.11.2023		Werkstoff (MATERIAL):		Bl. (page): A4		page: 1	
origin (drw/sketch/part no)		NAME: AD		Benennung (DESCRIPTION):		page: 1		pages: 1	
date of origin		DATE: 01.11.2023		1 off coaxial f/t type BNC on flange DN16 CF		REV		00	
00 First origin		DATE: 02.11.2023		Zeich. Nr. (Drw. No.): 241-BNC-C16		REV		00	
REV Beschreibung (CHANGING)		LAST SAVE DAT.: 02.11.2023		part. no. 241-BNC-C16					