
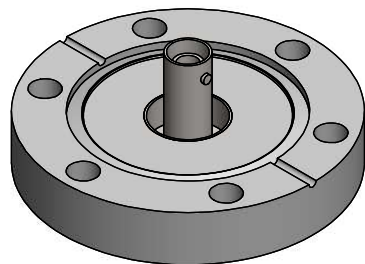
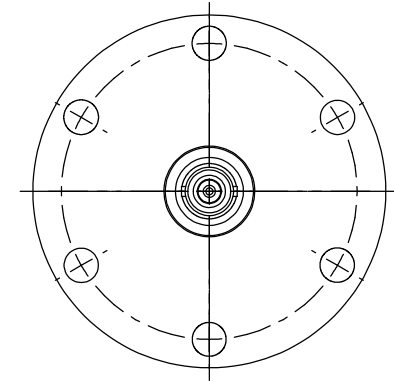
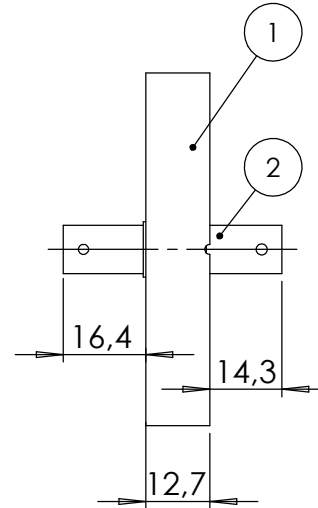


POS-NR.	DESCRIPTION	MATERIAL	QTY
1	modified flange DN40 CF	1.4404 (316L)	1
2	coaxial f/t type SHV, 50 Ohm, 6KV, 3A, double sided, grounded shield, weldable	Stainless Steel	1

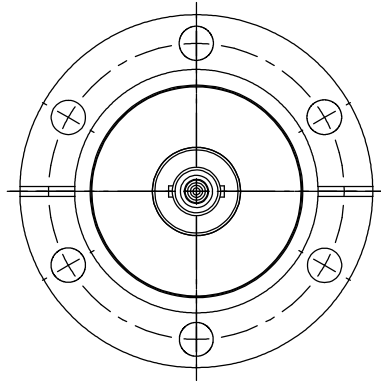

Bemerkungen (Remarks)				Freimaßtoleranz (Standard Tolerance)		Maßstab (Scale)	Rauheit (Roughness)		europ.Projektion		
All informations provided in this drawing is considered to be confidential, proprietary and secret information. If is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allecra GmbH.						1:1.5					
											Material, Standard Oberfläche (Treatment)
				Datum	Name	Bezeichnung (Title)				Gewicht (weight)	
				Design	13.09.2022	AD	1 off coaxial f/t SHV, 50 Ohm, double sided on flange DN40 CF				g
				Drawn	13.09.2022	AD					Page:
				Check			1	1			
						Zeichnungsnummer (Drawing No.)				Revision	
						242-SHVD50-C40					
Index	Modification	Date	Name	Datei (File)				Format A4			